

BAMBOO SERIES



IP66	IK10	220-240V	45-20 WATTS
1-10V	DALI	5 YRS Warranty	

PHYSICAL

Body	Polycarbonate
End cap	Stainless Steel 316
Finish	White RAL 9016

OPTICAL

Light Emission	Symmetrical
Aiming	Adjustable
Beam Angle	140°


ELECTRICAL

Lamp	LED
Color Rendering	>80
Color Temperature	3000K - 4000K - 5000K - 5700K
Gear	220-240 VAC 50-60Hz
Ambient Temp.	-20°C ~ 45°C




Power (W)	Dimensions(mm)	Lumen(lm)
20W	Ø75.2xL600	2250lm
33W	Ø75.2xL1200	3950lm
45W	Ø75.2xL1500	5200lm

Plastic connector and stainless steel connector for optional

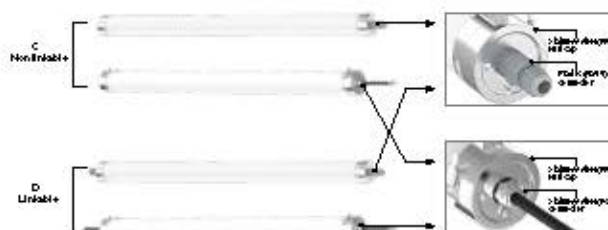

BAMBOO SERIES is an ideal alternative to fluorescent lamps. It adopts high lumen SMD chip, the high transmittance PC cover makes a uniform and soft light output. With waterproof joint at both ends, it can be linkable. Special clip-on bracket design makes an easier installation. The installation angle is adjustable with different scales. This luminaire can be used in farm, factory, warehouse, workshop, and other lighting area with high humidity and dusty places. Pendant/ Surface mounted installation.



ORDERING CODE

SERIES NAME - PRODUCT RANGE - CCT - OPTICS - CONTROL

BAMBOO	1.1	30 3000K	140 140°	1 ON-OFF
	1.2	40 4000K		2 1-10V
	1.3	50 5000K		3 DALI
		57 5700K		