


BEND BOLLARD (Dual)

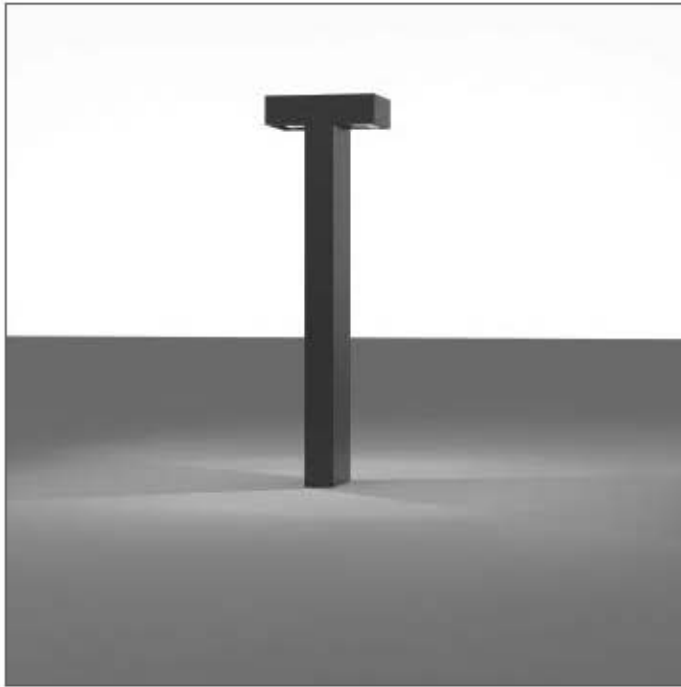

IP66

IK09

20/40
WATTS

5YRS
Warranty

1-10V

220-240V

DALI

PHYSICAL

Body	Aluminium Extruded Profile
Finish	Polyester Powder Coated
Dimensions	L180xW270xH1000mm

OPTICAL

Di°user	Clear Polycarbonate
Light distribution	Assymetric

ELECTRICAL


Lamp	LED
Color Rendering	>80
Color Temperature	3000K-4000K-5000K
Gear	Electronic Included
	220-240 VAC Non-Dimmable Driver
	1-10V or DALI available on request
Operating Temperature	-40°C ~ +50°C
Humidity	10% ~ 90%RH

Power (W)	Front light emission lumen(lm)	Side light emission lumen(lm)
20W	2x112.5lm	2x980lm
40W	2x222.5lm	2x1960lm


BEND BOLLARD series is an L-shaped bollard design that represents a functional and aesthetically pleasing solution in urban architecture and infrastructure. This bollard has front and side assymetrical light distribution, with an extruded aluminum body.

-Simple design that blends in with di°erent types of architecture applications such as pathways, landscape areas, and other public spaces.


-Single or double head options.

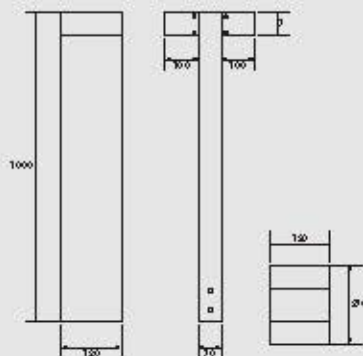

Front light emission



Side light emission



ORDERING CODE

SERIES NAME - PRODUCT RANGE - CCT - OPTICS - CONTROL

BEND BOLLARD	1	30 3000K	F FRONT	1 ON-OFF
DUAL	2	40 4000K	S SIDE	2 1-10V
		50 5000K		3 DALI