


EDGE OPEN BOLLARD

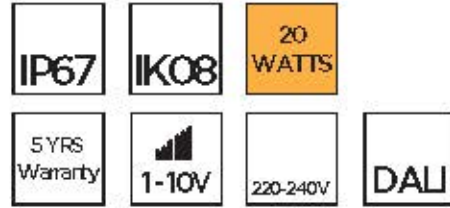

PHYSICAL

Body	Aluminium Extruded Profile
Finish	Polyester Powder Coated
Dimensions	L100xW150xH1000mm

OPTICAL


Di°user	Clear/Opal Polycarbonate
Light Emission	Indirect Light Distribution

ELECTRICAL

Lamp	LED
Power	2x10W
Light source lumen	2x1200lm
Color Rendering	>80
Color Temperature	3000K-4000K-5000K
Gear	Electronic Included
	220-240 VAC Non-Dimmable Driver
	1-10V or DALI available on request
Operating Temperature	-40°C ~ +50°C
Humidity	10% ~ 90%RH

EDGE OPEN series is a distinctive bollard design that provides vibrant illumination for pathways, landscape zones, and various public areas.

- Reduced glare through a concealed light source.
- Enhanced linear forward light distribution option with complete cut-off and minimized stray light.
- Simple installation and maintenance.
- Contemporary and refined design that adds a distinctive touch to outdoor applications.

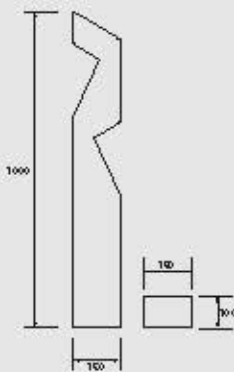

ORDERING CODE

SERIES NAME - CCT - CONTROL

EDGE OPEN	30 3000K 1 ON-OFF
BOLLARD	40 4000K 2 1-10V
	50 5000K 3 DALI

