


# PATTERN BOLLARD

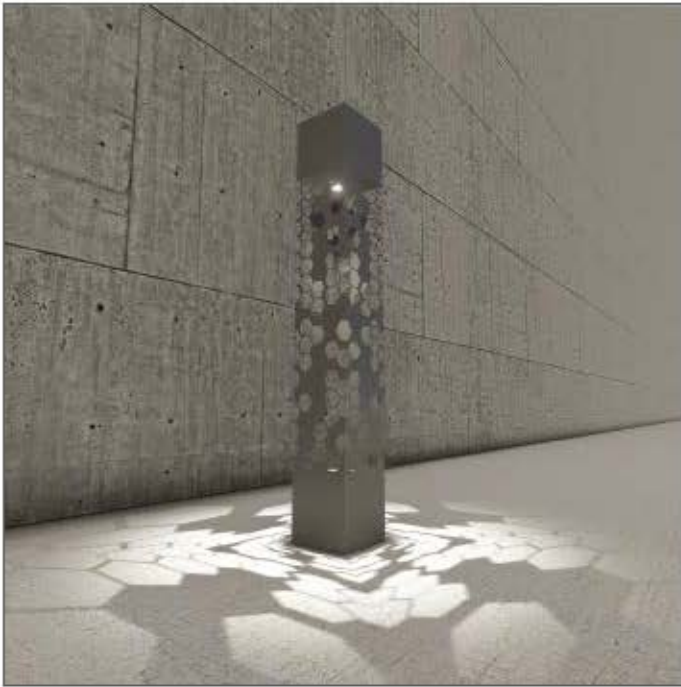

## PHYSICAL

Body	Aluminium Extruded Profile
Finish	Polyester Powder Coated
Dimensions	L150xW150xH1000mm


## OPTICAL

Di°user	Opal Polycarbonate
Light Emission	Indirect Light Distribution

## ELECTRICAL

Lamp	LED
Light source lumen	1200lm
Color Rendering	>80
Color Temperature	3000K-4000K-5000K
Gear	Electronic Included
	220-240 VAC Non-Dimmable Driver
	1-10V or DALI available on request
Operating Temperature	-40°C ~ +50°C
Humidity	10% ~ 90%RH

## PATTERNS

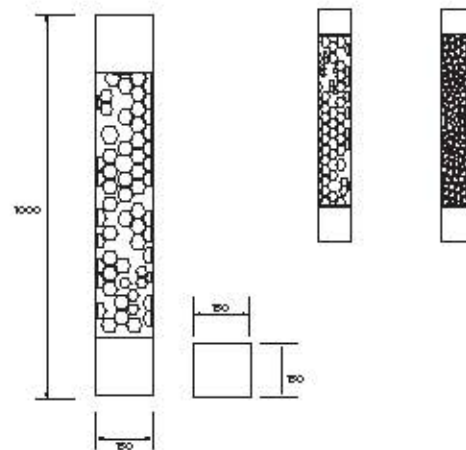

**PATTERN** series of bollards is a special bollard with unique reflections, distinguished by its square form factor, captivating light effects, and robust construction, PATTERN bollard is a great choice for illuminating pathways, landscaped areas, and various public spaces.

- Optimized symmetrical uniform light distribution with a unique effect.
- Features a minimalistic design, allowing seamless integration with diverse architectural styles.
- Sophisticated and decorative pattern on 4 sides.
- Easy installation and maintenance.

## ORDERING CODE

### SERIES NAME - CCT - CONTROL

PATTERN BOLLARD	30	3000K	1	ON-OFF
	40	4000K	2	1-10V
	50	5000K	3	DALI