

SIGNAL



IP65

IK09

15/25
WATTS

5 YRS
Warranty

1-10V

220-240V

DALI

PHYSICAL

Body	Die-cast Aluminum
Finish	Powder Coated
Dimensions	Ø170xH900mm
	Ø170xH600mm
	Ø170xH400mm


OPTICAL

Diffuser	Clear Polycarbonate
Light distribution	Assymetric

ELECTRICAL

Lamp	LED
Lumen	
	15W 1125lm
	25W 1625lm
Color Rendering	>80
Color Temperature	3000K-4000K-5000K
Gear	Electronic Included
	220-240VAC Non-Dimmable Driver
	1-10V or DALI available on request
Operating Temperature	-20°C ~ + 50°C
Humidity	10% ~ 95%RH

SIGNAL series of bollards with pleasant aesthetics and a touch of prestige for any residential and landscape setting, with the most energy-efficient lighting technologies. Signal is a bollard for driveways, parks and pedestrian walkways etc.

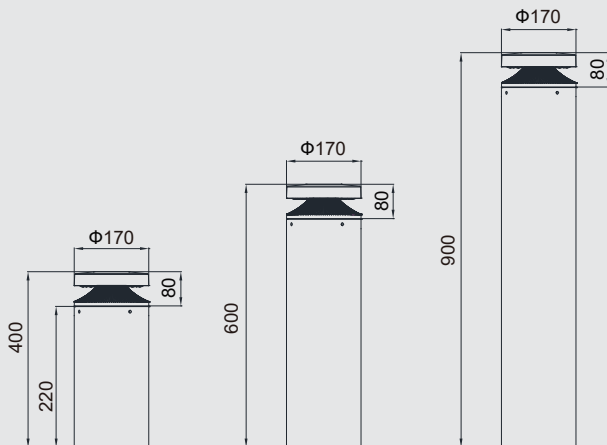

ORDERING CODE

SERIES NAME - PRODUCT RANGE - CCT - CONTROL

SIGNAL	1	30 3000K 1 ON-OFF
	2	40 4000K 2 1-10V
		50 5000K 3 DALI