


SWEEP SOLAR

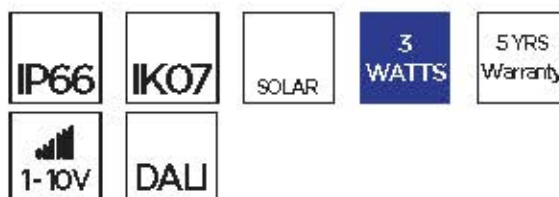

PHYSICAL	
Body	Aluminium
Finish	Powder Coated -Black RAL 9017
Dimensions	0.5m: Ø230x520mm 0.9m: Ø230x920mm

OPTICAL	
Diffuser	Polycarbonate
Light distribution	Asymmetric


ELECTRICAL	
Lamp	LED
Power	SET01 340lm/SET02 320lm/SET03 420lm
Color Rendering	80
Color Temperature	4000K (3000K & 5000K Optional)
Solar Panel	Mono-Crystalline Solar Panel
Solar Panel Wattage	5W
Battery	LifeP04 Battery
Battery Capacity	38.4Wh
Charging Time	>8 Hours
Operating Time	Normal Mode>11 Hours
Operating Temperature	Intelligent Mode 2-3 Days 0°C ~ +50°C
Humidity	10% ~ 90%RH

WARRANTY	
Battery	3 Years
Other Accessories	5 Years



SWEEP SOLAR bollard represents a groundbreaking LED solar bollard that has been elevated in terms of aesthetics and creativity. With an IP66 rating, a mono-crystalline solar panel, and UV-resistant PC material, this bollard, featuring an architectural design, has gained significant popularity in various settings such as pathways, gardens, sidewalks, buildings and more.

Key Features: IP66 & IK07, unique and elegant appearance, professional SET1, SET2, SET3 Lighting distribution, high efficiency mono-crystalline solar panel, long lifespan LifeP04 Battery, 8 hour charging, working 2-3 days.

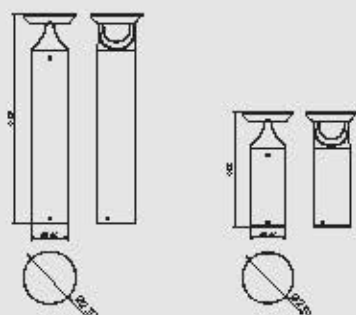

ORDERING CODE

SERIES NAME - PRODUCT RANGE - CCT - OPTICS - CONTROL

SWEEP SOLAR	1 0.5m	30 3000K	1 SET 1	1 ON-OFF
	2 0.9m	40 4000K	2 SET 2	
		50 5000K	3 SET 3	