

# TORCH POLE



IP66	IK08	40-100 WATTS
5 YRS Warranty	1-10V	220-240V
		DALI

## PHYSICAL

Body	Die Casting Aluminum
Finish	Powder coating
Dimensions	ø450xH526mm


## OPTICAL

Diffuser	Tempered glass and PC optical lens
Light distribution	7 optics lens for optional


## ELECTRICAL

Lamp	LED
Color Rendering	>70
Color Temperature	3000K, 4000K, 5000K
Gear	Electronic Included
	220-240 VAC Non-Dimmable Driver
	1-10V or DALI available on request
Operating Temperature	-30°C ~ +50°C
Humidity	10% ~ 90%RH

Power (W)	Lumen(lm)
40W	4800lm
60W	7200lm
75W	9000lm
100W	12000lm

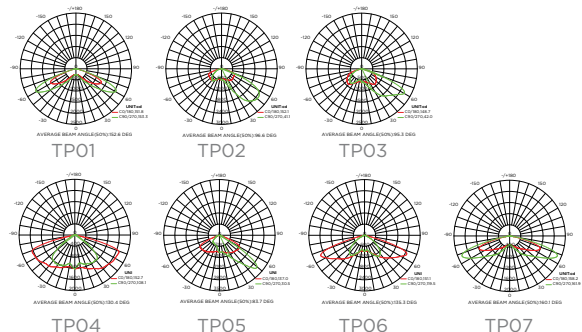

**TORCH POLE** aligns with the contemporary trend of urban diversity through its sleek curvature. It is conveniently used in courtyards, private and public gardens, streets and walkways, offering lumen packages ranging from 4800-12000lm. To meet the demands of different outdoor scenarios, TORCH POLE boasts a signifying robust durability against external impacts. This resilience makes TORCH POLE a reliable choice for outdoor spaces, capable of withstanding the challenges posed by weather conditions. Moreover, TORCH POLE provides a wide range of optics, allowing users to customize the lighting experience based on the requirements of each setting.

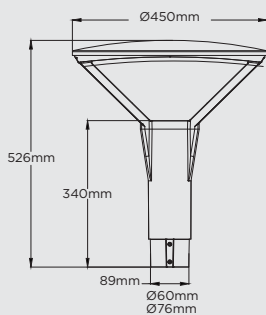

## ORDERING CODE

SERIES NAME - PRODUCT RANGE - CCT - OPTICS - CONTROL

TORCH	1	30 3000K	TP01	1 ON-OFF
	2	40 4000K	TP02	2 1-10V
	3	50 5000K	TP03	3 DALI
	4		TP04	
			TP05	
			TP06	
			TP07	

ACCESSORIES



Post top mount adaptor



Wall mount adaptor

