

# DAISY SERIES



# DAISY SERIES



IP44	220-240V	7-20 WATTS	UGR <19
1-10V	DALI	5 YRS Warranty	LOW GLARE

## PHYSICAL

Body	Die cast Aluminum
Finish	Polyester Powder Coated

## OPTICAL

Diffuser	Polycarbonate
Beam Angle	15°, 24°, 36°, 60°


## ELECTRICAL

Lamp	LED
Color Rendering	>80 (>90 available on request)
Color Temperature	3000K-4000K-6000K
Gear	Electronic Included
	220-240 VAC   50-60Hz
	1-10V or DALI available on request
Ambient Temp.	-20°C ~ 45°C

Series	Rated Power(W)	Lumen (lm)	Dimensions (mm)	Cut-out Dimensions (mm)
DAISY 1.1	7W	560lm	Ø85xH44	Ø95
DAISY 1.2	12W	960lm	Ø100xH52	
DAISY 1.3	20W	1600lm	Ø125xH65	Ø115

**DAISY SERIES** is an anti-glare downlight with honeycomb grill. It adopts high lumen light source, deep reflector and low glare **UGR<19**, which provides a comfortable visual experience. The aluminum profile provides excellent thermal dissipation and ensures a long lifespan.

DALI, 1-10V driver are available to provide excellent dimming effect. It is designed for general lighting applications in offices, schools, hotels etc. It is also widely used for public areas, such as stairway, lobby, reception, corridors etc.

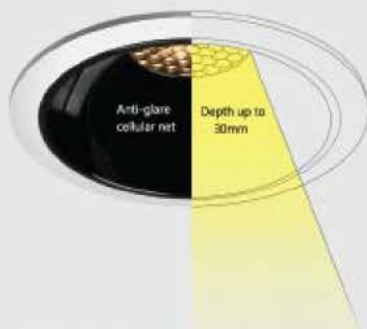

## ORDERING CODE

SERIES NAME - PRODUCT RANGE - BODY FINISH - REFLECTOR COLOR - CCT - OPTICS - CONTROL

DAISY	I.1	W WHITE	W WHITE	30 3000K	15 15°	1 ON-OFF
	I.2	B BLACK	B BLACK	40 4000K	24 24°	2 1-10V
	I.3			60 6000K	36 36°	3 DALI
					60 60°	

