


OLEANDER SERIES



OLEANDER SERIES single head and double head provided for wide choice. Adjustable lighting direction offers various lighting orientation. OLEANDER is a recess-mounted LED that offers outstanding lumen packages for spaces that require a large amount of light.

This luminaire is indicated for lighting from high ceilings and for retail stores due to its adjustable factor.

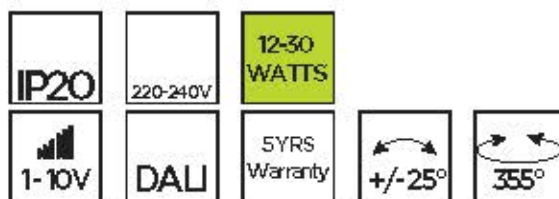

PHYSICAL

Body	Die cast Aluminium
Finish	Polyester Powder Coated

OPTICAL

Diffuser	Polycarbonate
Reflector	Polycarbonate
Aiming	355° Rotatable horizontally ±25° Adjustable vertically
Beam Angle	15°, 24°, 36°

ELECTRICAL

Lamp	LED
Color Rendering	>80 (>90 available on request)
Color Temperature	3000K-4000K-6000K
Gear	Electronic Included
	220-240 VAC 50-60Hz
	1-10V or DALI available on request

OLEANDER ROUND



OLEANDER SQUARE



OLEANDER DUAL



OLEANDER SERIES

	Rated Power(W)	Lumen(lm)	Dimensions(mm)	Cut out Dimensions(mm)
OLEANDER ROUND 1.1	12W	1020lm	Ø90xH80	Ø75mm
OLEANDER ROUND 1.2	20W	1700lm	Ø110xH105	Ø95mm
OLEANDER ROUND 1.3	30W	2550lm	Ø135xH140	Ø115mm
OLEANDER SQUARE 1.1	12W	1020lm	L90xW90xH80	80x75mm
OLEANDER SQUARE 1.2	20W	1700lm	L117xW117xH105	95x90mm
OLEANDER SQUARE 1.3	30W	2550lm	L140xW140xH125	120x115mm
OLEANDER DUAL 1.1	2x12W	2x1020lm	L170xW90xH80	152x75mm
OLEANDER DUAL 1.2	2x15W	2x1280lm	L210xW117xH105	185x95mm
OLEANDER DUAL 1.3	2x20W	2x1700lm	L210xW117xH105	185x95mm
OLEANDER DUAL 1.4	2x30W	2x2550lm	L250xW140xH125	120x225mm

ORDERING CODE

SERIES NAME - PRODUCT RANGE - BODY FINISH - CCT - OPTICS - CONTROL

OLEANDER	ROUND 1.1	W WHITE	30 3000K	15 15°	1 ON-OFF
	ROUND 1.2	B BLACK	40 4000K	24 24°	2 1-10V
	ROUND 1.3		60 6000K	36 36°	3 DALI
	SQUARE 1.1				
	SQUARE 1.2				
	SQUARE 1.3				
	DUAL 1.1				
	DUAL 1.2				
	DUAL 1.3				
	DUAL 1.4				