


POPPY SERIES



POPPY SERIES

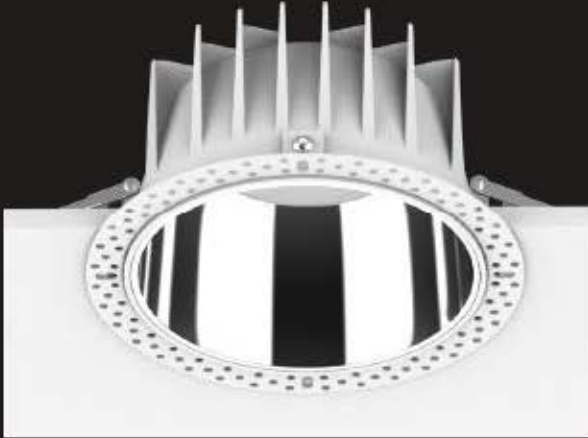

IP54	IK06	220-240V	8-50 WATTS
1-10V	DALI	TRIAC	5 YRS Warranty

PHYSICAL

Body	Aluminium
Finish	White RAL 9016 / Black RAL9005


OPTICAL


Diffuser	PC
Light Emission	Direct
Beam Angle	60°
UGR	<19

ELECTRICAL

Lamp	LED
Color Rendering	>80
Color Temperature	3000K-4000K-5700K
Gear	220-240 VAC 50-60Hz / PF>0.9
Ambient Temp.	-20°C ~ 40°C

POPPY SERIES downlight provides a high lighting efficiency, and it comes with customary deep reflector which provide comfortable lighting and humanization design UGR<19. without compromising on lighting performance. CCT changeable function is available. It offers a wide choice of options for creating the desired ambience. Two frame options: standard frame and invisible frame, complete size from 2.5 inch to 10 inch. It is designed for general lighting applications in office, supermarket, shop, school, hotel, etc. It is also widely used for public areas, such as stairway, lobby, reception, corridors, etc.

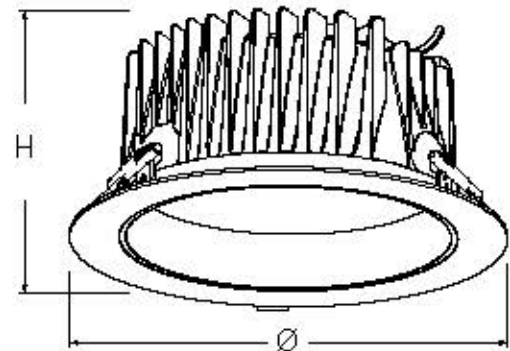

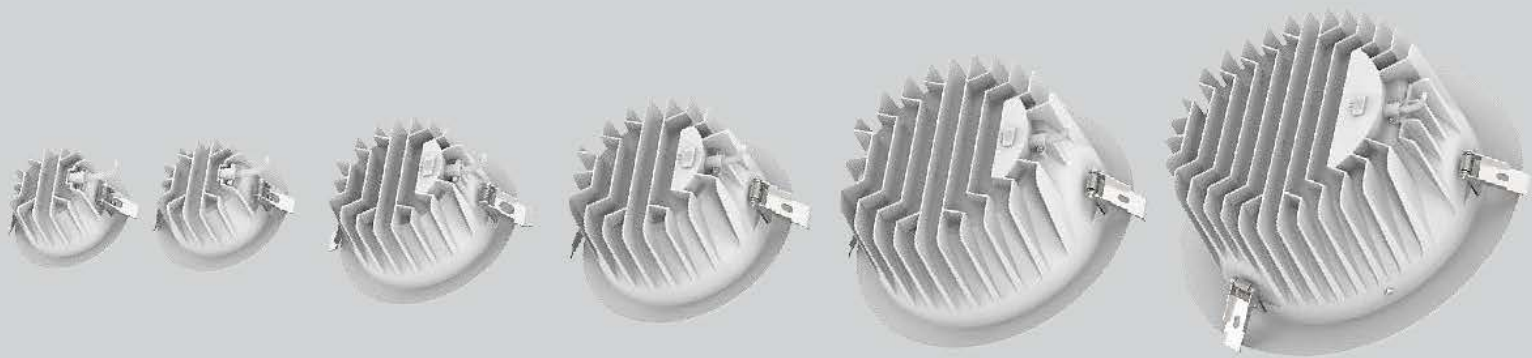

POPPY SERIES

POPPY 1.1	8W	450lm	Ø95xH55	Ø82-88
POPPY 1.2	10W	600lm	Ø108xH55	Ø90-95
POPPY 1.3.1	10W	850lm	Ø145xH77	Ø125x135
POPPY 1.3.2	18W	1500lm	Ø145xH77	Ø125x135
POPPY 1.4.1	18W	1500lm	Ø172xH90	Ø150-165
POPPY 1.4.2	25W	2400lm	Ø172xH90	Ø150-165
POPPY 1.5.1	18W	1800lm	Ø228xH107	Ø200-210
POPPY 1.5.2	25W	2600lm	Ø228xH107	Ø200-210
POPPY 1.5.3	35W	3400lm	Ø228xH107	Ø200-210
POPPY 1.5.4	40W	3700lm	Ø228xH107	Ø200-210
POPPY 1.6.1	20W	2000lm	Ø280xH123	Ø230-260
POPPY 1.6.2	35W	3700lm	Ø280xH123	Ø230-260
POPPY 1.6.3	40W	4400lm	Ø280xH123	Ø230-260
POPPY 1.6.4	50W	4700lm	Ø280xH123	Ø230-260

ORDERING CODE

SERIES NAME - PRODUCT RANGE - Frame Option- CCT - OPTICS - MOUNTING - CONTROL

POPPY	1.1 1.2 1.3.1 1.3.2 1.4.1 1.4.2 1.5.1 1.5.2 1.5.3 1.5.4 1.6.1 1.6.2 1.6.3 1.6.4	T Trim L Trimless	30 3000K 40 4000K 57 5700K 65 6500K	60 60°	R Recessed	1 ON-OFF 2 TRIAC 3 1-10V 4 DALI
-------	------------------------------------------------------------------------------------------------------------------------	----------------------	----------------------------------------------	--------	------------	------------------------------------------