

BEND BOLLARD (Dual)



IP66	IK09	220-240V	5 YRS Warranty	20/40 WATTS
------	------	----------	-------------------	----------------

Upon request

1-10V	DALI
-------	------

PHYSICAL

Body	Aluminium Extruded Profile
Finish	Polyester Powder Coated
Dimensions	L180xW270xH1000mm

OPTICAL


Diffuser	Clear Polycarbonate
Light distribution	Assymetric

ELECTRICAL


Lamp	LED
Color Rendering	>80
Color Temperature	3000K-4000K-5000K
Gear	Electronic included 50-60Hz 220-240VAC Non-Dimmable Driver 1-10V dimming or DALI on request
Operating Temperature	-40°C ~ +50°C
Humidity	10% - 90%RH

Range	Power(W)	Front light emission lumen(lm)	Side light emission lumen(lm)
BEND DUAL 1	20W	2x1112.5lm	2x980lm
BEND DUAL 2	40W	2x2225lm	2x1960lm

AVAILABLE OPTICS



Front light emission




Side light emission

BEND BOLLARD series is an L-shaped bollard design that represents a functional and aesthetically pleasing solution in urban architecture and infrastructure. This bollard has front and side asymmetrical light distribution, with an extruded aluminum body.

-Simple design that blends in with different types of architecture applications such as pathways, landscape areas, and other public spaces.

-Single or double head options.

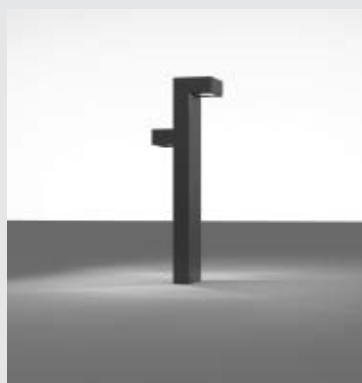

ORDERING CODE

SERIES NAME - PRODUCT RANGE - CCT - OPTICS - CONTROL

BEND BOLLARD	1	30 3000K	F FRONT	1 ON-OFF
DUAL	2	40 4000K	S SIDE	2 1-10V
		50 5000K		3 DALI