

# EDGE OPEN BOLLARD



IP67	IK08	220-240V	5 YRS Warranty	20 WATTS
------	------	----------	-------------------	-------------

Upon request

1-10V	DALI
-------	------

## PHYSICAL

Body	Aluminium Extruded Profile
Finish	Polyester Powder Coated
Dimensions	L100xW150xH1000mm

## OPTICAL



Diffuser	Clear/Opal Polycarbonate
Light Emission	Indirect Light Distribution

## ELECTRICAL

Lamp	LED
Power	2x10W
Light source lumen	2x1200lm
Color Rendering	>80
Color Temperature	3000K-4000K-5000K
Gear	Electronic included   50-60Hz 220-240VAC Non-Dimmable Driver 1-10V dimming or DALI on request
Operating Temperature	-40°C - +50°C
Humidity	10% - 90%RH

**EDGE OPEN** series is a distinctive bollard design that provides vibrant illumination for pathways, landscape zones, and various public areas.

- Reduced glare through a concealed light source.
- Enhanced linear forward light distribution option with complete cut-off and minimized stray light.
- Simple installation and maintenance.
- Contemporary and refined design that adds a distinctive touch to outdoor applications.

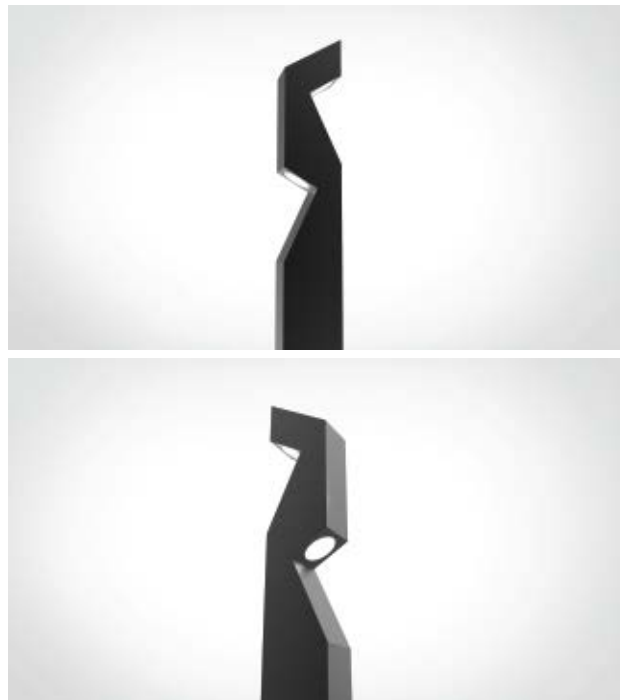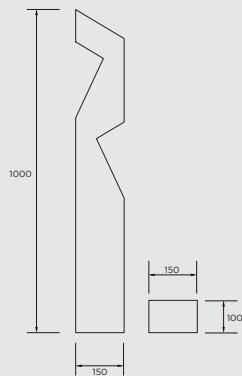

## ORDERING CODE

SERIES NAME - CCT - CONTROL

EDGE OPEN	30 3000K	1 ON-OFF
BOLLARD	40 4000K	2 1-10V
	50 5000K	3 DALI