


HALO POLE SERIES

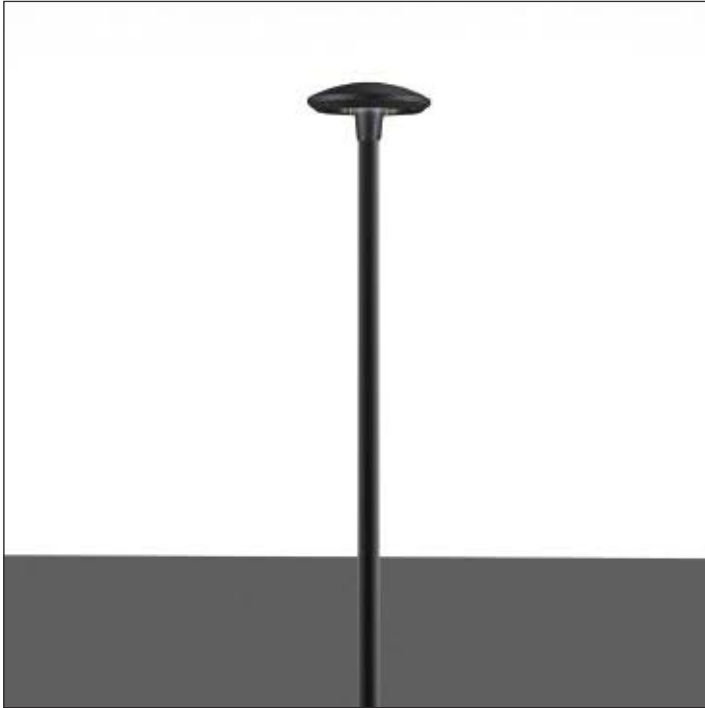

IP66	IK09	220-240V	5 YRS Warranty	20-100 WATTS
------	------	----------	-------------------	-----------------

Upon request

1-10V	DALI
-------	------

PHYSICAL

Body	Die Casting Aluminum
Finish	Powder coating
Dimensions	ø170xH540mm


OPTICAL

Diffuser	Opal Polycarbonate
Light distribution	2 ways light distribution

ELECTRICAL


Lamp	LED
Color Rendering	>70
Color Temperature	3000K, 4000K, Amber color
Gear	Electronic included 50-60Hz 220-240VAC Non-Dimmable Driver 1-10V dimming or DALI on request
Operating Temperature	-35°C ~ +50°C
Humidity	10% - 95%RH

HALO post-top crafted for pathways, parks, walkways, and gardens with a gentle radiance. Its celestial design not only captivates the eye but also ensures a seamless integration into any outdoor environment, effortlessly enhancing its surroundings. Crafted with precision, the external screws boast the durability of stainless steel 316L, promising longevity against the elements. Available in heights ranging from 3 to 6 meters, and wattages from 20 to 100W, our Halo fixture offers versatility tailored to diverse lighting needs, all while eliminating glare and preserving the ambiance of outdoor spaces.

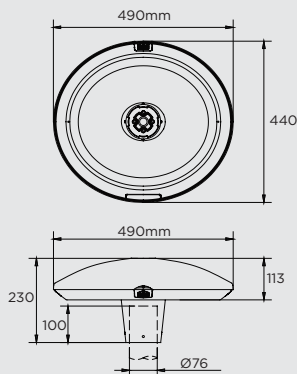

Range	Power (W)	Lumen (lm)
FLAME POLE 1	20W	2560lm
FLAME POLE 2	30W	3840lm
FLAME POLE 3	40W	5120lm
FLAME POLE 3	50W	6400lm
FLAME POLE 3	60W	7740lm
FLAME POLE 2	70W	8050lm
FLAME POLE 3	80W	9200lm
FLAME POLE 3	90W	10350lm
FLAME POLE 3	100W	11500lm

AVAILABLE OPTICS




SET101

ORDERING CODE

SERIES NAME - PRODUCT RANGE - CCT - OPTICS - CONTROL

HALO	1	30 3000K	1 SET101	1 ON-OFF
	2	40 4000K		2 1-10V
	3	AMBER		3 DALI

ACCESSORIES

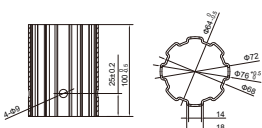

Adaptor