


EDGE CLOSED

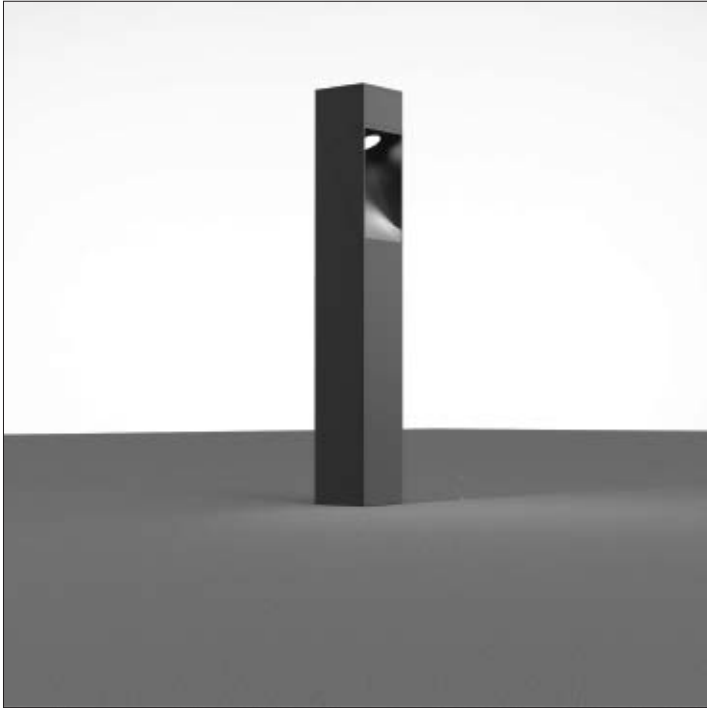

| | | | | |
|------|------|----------|-------------------|-------------|
| IP67 | IK08 | 220-240V | 5 YRS Warranty | 20 WATTS |
|------|------|----------|-------------------|-------------|

Upon request

| | |
|-------|------|
| 1-10V | DALI |
|-------|------|

PHYSICAL

| | |
|------------|----------------------------|
| Body | Aluminium Extruded Profile |
| Finish | Polyester Powder Coated |
| Dimensions | L100xW150xH1000mm |

OPTICAL


| | |
|----------------|-----------------------------|
| Diffuser | Clear Polycarbonate |
| Light Emission | Indirect Light Distribution |

ELECTRICAL

| | |
|-----------------------|---|
| Light source | LED |
| Power | 2x10W |
| Light source lumen | 2x1200lm |
| CRI | >80 |
| CCT | 3000K-4000K-5000K |
| Driver | Electronic included 50-60Hz 220-240VAC Non-Dimmable Driver 1-10V dimming or DALI on request |
| Operating Temperature | -40°C ~ +50°C |
| Humidity | 10% ~ 90%RH |

EDGE CLOSED series is a distinctive design that provides vibrant illumination for pathways, landscape zones, and various public areas.

- Reduced glare through a concealed light source.
- Enhanced linear forward light distribution option with complete cut-off and minimized stray light.
- Simple installation and maintenance.
- Contemporary and refined design that adds a distinctive touch to outdoor applications.

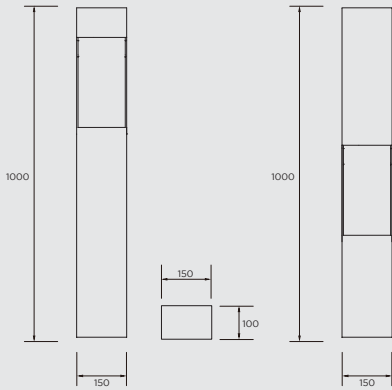

ORDERING CODE

SERIES NAME - CCT - CONTROL

EDGE CLOSED 30 3000K 1 ON-OFF
 40 4000K 2 1-10V
 50 5000K 3 DALI