


LILY SERIES



LILY SERIES

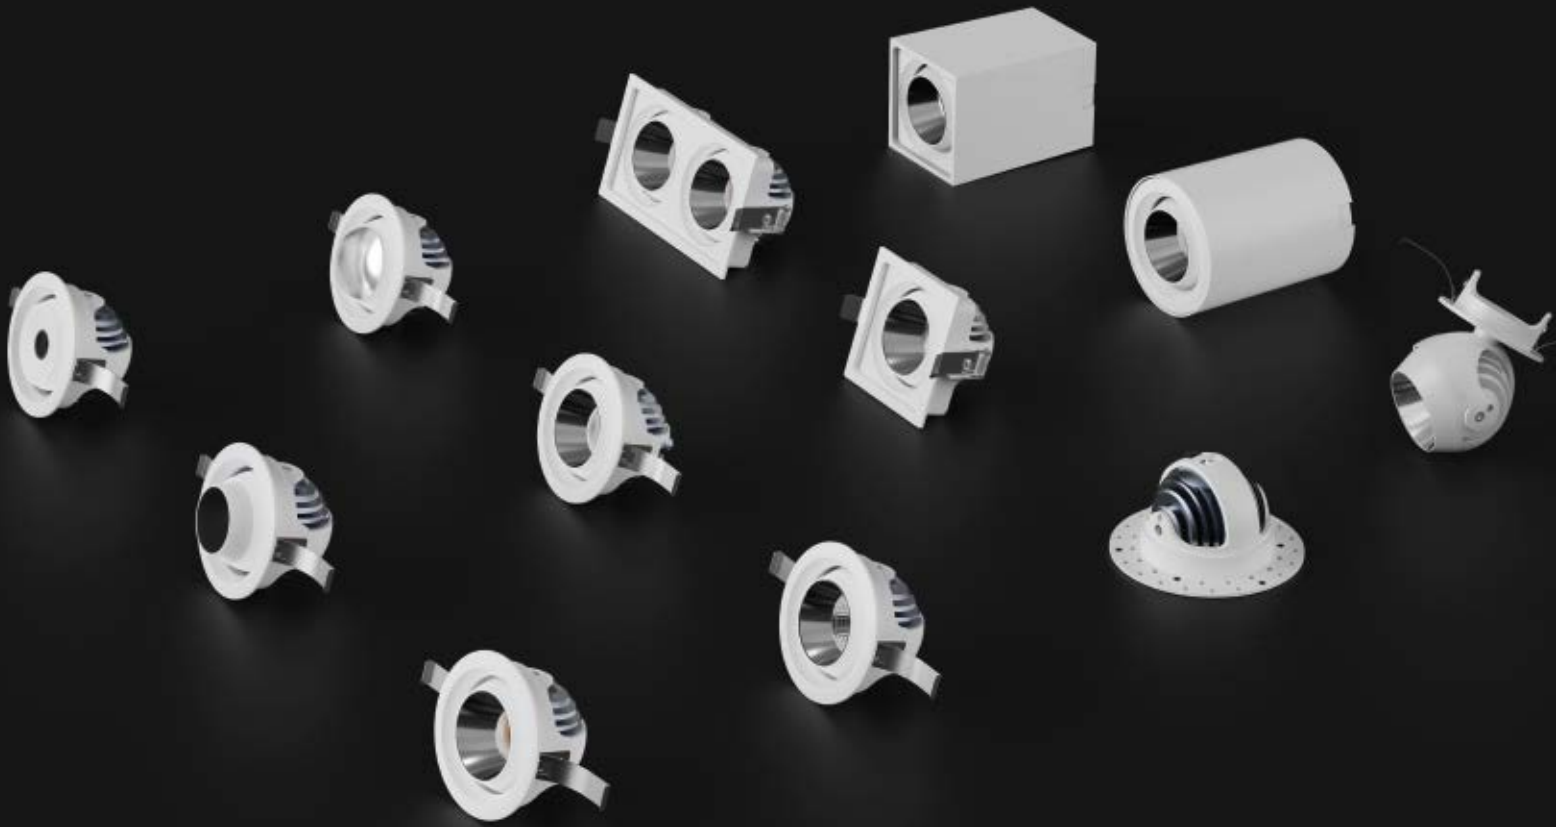

IP65	220-240V	5 YRS Warranty	12 WATTS
------	----------	-------------------	-------------

Upon request

1-10V	DALI	+/- 30°	355°
-------	------	---------	------

PHYSICAL

Body Aluminum(Frame)

OPTICAL

Diffuser PS

Light Emission Direct

ELECTRICAL

Light source LED CREE

CRI >80

CCT 3000K - 4000K - 5000K - 5700K

Driver Electronic included | 50-60Hz
220-240VAC Non-Dimmable Driver
1-10V dimming or DALI on request

Ambient Temp. -10°C ~ 40°C

LILY SERIES is designed with exquisite contour

- 355° rotation can be achieved.
- 30° degree swing angle.
- 11 forms available.
- Equipped with 6 optical schemes.
- IP54 can be made.
- With flexible mobility and convenient adjustment function.
- Meets the needs of multiple scenarios.
- The installation method can be embedded, trimless, surface-embedded and surface



LILY 1.1







LILY 1.2

LILY 1.3

LILY 1.4

LILY 1.5


LILY 1.6



SINGLE SQUARE



DOUBLE SQUARE

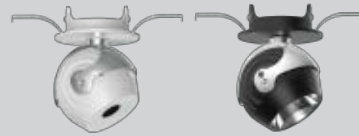

EMBEDDED



SURFACE ROUND



SURFACE SQUARE

PRODUCT RANGE

	Rated Power(W)	Beam angle	Dimensions(mm)	Cut out dimensions(mm)	Optical accessories
LILY 1.1	12W	15°,24°,36°,50°	Ø85xH57	Ø75	Honeycomb(W/SS ring);Sealing rubber ring(IP44)
LILY 1.2	12W	15°,24°,36°,50°	Ø85xH57	Ø75	-
LILY 1.3	12W	15°,24°,36°,50°	Ø85xH70	Ø75	-
LILY 1.4	12W	60°	Ø85xH73	Ø75	-
LILY 1.5	12W	10°,50°	Ø85xH57	Ø75	-
LILY 1.6	12W	18°,24°,38°	Ø85xH57	Ø75	Honeycomb(W/SS ring)

ORDERING CODE

SERIES NAME - PRODUCT RANGE - REFLECTOR FINISH - FRAME TYPE - CCT - OPTICS - CONTROL

LILY	1.1	C CHROME	R ROUND	30 3000K	10 10°	1 ON-OFF
	1.2	S SAND SILVER	T TRIMLESS	40 4000K	15 15°	2 1-10V
	1.3	W MATT WHITE	SS SQUARE SINGLE	60 6000K	18 18°	3 DALI
	1.4	CG CHAMPAGNE GOLD	SD SQUARE DOUBLE		24 24°	
	1.5	PB PEARL BLACK			36 36°	
	1.6	MB MATT BLACK			38 38°	
					50 50°	
					60 60°	