

# ORBIT BOLLARD



Upon request



## PHYSICAL

Body	Aluminium Extruded Profile
Finish	Polyester Powder Coated
Dimensions	Ø133xH1000mm

## OPTICAL

Diffuser	Clear Polycarbonate
Light distribution	Assymetric


## ELECTRICAL

Light source	LED
CRI	>80
CCT	3000K-4000K-5000K
Driver	Electronic included   50-60Hz 220-240VAC Non-Dimmable Driver 1-10V dimming or DALI on request
Operating Temperature	-40°C ~ +50°C
Humidity	10% ~ 90%RH

Range	Power(W)	Lumen (lm)
ORBIT 1	10W	1200lm
ORBIT 2	20W	2400lm

**ORBIT** series stands out as a dependable option for pathways, landscaped areas, and various public spaces, thanks to its rounded structure, diverse column choices, and three-way light distribution.

- Reduced glare is achieved through a recessed light source.
- The three-way light distribution not only effectively illuminates pathways and areas but also introduces a distinctive visual effect.
- Various height options and a coordinating column make it suitable for high-end architectural projects.
- Its minimalistic design ensures seamless integration with diverse architectural styles.

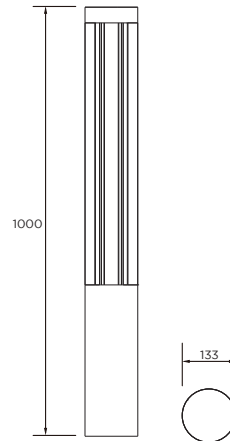

## ORDERING CODE

SERIES NAME - PRODUCT RANGE - CCT - CONTROL

ORBIT	1	30 3000K	1 ON-OFF
	2	40 4000K	2 1-10V
		50 5000K	3 DALI