

TORCH POLE



IP66	IK08	220-240V	5 YRS Warranty	40-100 WATTS
------	------	----------	-------------------	-----------------

Upon request

1-10V	DALI
-------	------

PHYSICAL

Body	Die Casting Aluminum
Finish	Powder coating
Dimensions	ø450xH526mm


OPTICAL

Diffuser	Tempered glass and PC optical lens
Light distribution	7 optics lens for optional

ELECTRICAL


Light source	LED
CRI	>70
CCT	3000K, 4000K, 5000K
Driver	Electronic included 50-60Hz 220-240VAC Non-Dimmable Driver 1-10V dimming or DALI on request
Operating Temperature	-30°C ~ +50°C
Humidity	10% - 90%RH

TORCH POLE aligns with the contemporary trend of urban diversity through its sleek curvature. It is conveniently used in courtyards, private and public gardens, streets and walkways, offering lumen packages ranging from 4800-12000lm. To meet the demands of different outdoor scenarios, TORCH POLE boasts a signifying robust durability against external impacts. This resilience makes TORCH POLE a reliable choice for outdoor spaces, capable of withstanding the challenges posed by weather conditions. Moreover, TORCH POLE provides a wide range of optics, allowing users to customize the lighting experience based on the requirements of each setting.



Range	Power (W)	Lumen (lm)
TORCH POLE 1	40W	4800lm
TORCH POLE 2	60W	7200lm
TORCH POLE 3	75W	9000lm
TORCH POLE 3	100W	12000lm

AVAILABLE OPTICS

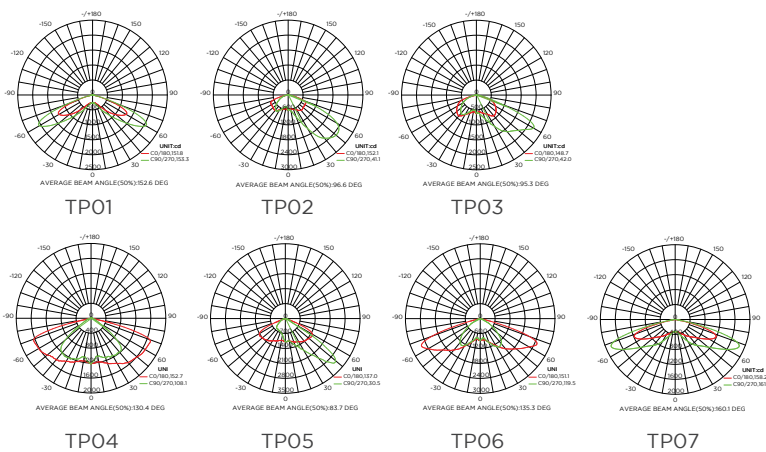

ORDERING CODE

SERIES NAME - PRODUCT RANGE - CCT - OPTICS - CONTROL - ACCESSORIES

TORCH	1	30 3000K	TP01	1 ON-OFF	TA POST TOP ADAPTOR
	2	40 4000K	TP02	2 1-10V	WA WALL MOUNT ADAPTOR
	3	50 5000K	TP03	3 DALI	
	4		TP04		
			TP05		
			TP06		
			TP07		

ACCESSORIES



Post top
mount adaptor



Wall mount
adaptor