

# VINCA ROUND SERIES



IP40 IP54	220-240V	5 YRS Warranty	7-35 WATTS
--------------	----------	-------------------	---------------

Upon request

1-10V	TRIAC
-------	-------

## PHYSICAL

Body	Aluminum die-casting
Finish	White RAL 9016 / Black RAL9005

## OPTICAL

Diffuser	Polycarbonate
Light Emission	Direct
Beam Angle	90°


## ELECTRICAL

Light source	LED
CRI	>80
CCT	3000K - 4000K - 5000K - 5700K
Driver	Electronic included   50-60Hz 220-240VAC Non-Dimmable Driver 1-10V dimming or TRIAC on request
Ambient Temp.	-20°C ~ 40°C


**VINCA ROUND DOWNLIGHTS SERIES** with super slim design, adopting high lumen LED, PC diffuser with uniform light. The Aluminum profile provides excellent thermal dissipation, can be surface mounted with special accessories.

The shielding angle is bigger so it can lower the glare. It is designed for general lighting applications in offices, supermarket, shops, schools, hotels etc. It is also widely used for public areas, such as stairway, lobby, reception, corridors etc.







+



=

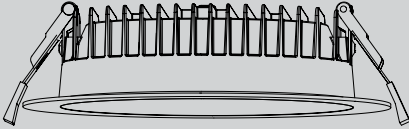

## PRODUCT RANGE

	Rated Power(W)	Lumen(lm)	Dimensions(mm)	Cut out dimensions(mm)
VINCA 1.1	7W	630lm	Ø85xH49	Ø65-75
VINCA 1.2	10W	940lm	Ø110xH52	Ø90-95
VINCA 1.3	12W	1250lm	Ø145xH53	Ø120-130
VINCA 1.3.1	18W	1810lm	Ø145xH53	Ø120-130
VINCA 1.4	18W	2000lm	Ø170xH53	Ø140-150
VINCA 1.4.1	25W	2500lm	Ø170xH53	Ø140-150
VINCA 1.5	18W	2000lm	Ø190xH53	Ø160-170
VINCA 1.5.1	25W	2500lm	Ø190xH53	Ø160-170
VINCA 1.6	15W	2130lm	Ø228xH53	Ø200-210
VINCA 1.6.1	25W	2910lm	Ø228xH53	Ø200-210
VINCA 1.6.2	35W	4040lm	Ø228xH53	Ø200-210

## ORDERING CODE

SERIES NAME - PRODUCT RANGE - CCT - MOUNTING - CONTROL

VINCA ROUND

I.1  
I.2  
I.3  
I.3.1  
I.4  
I.4.1  
I.5  
I.5.1  
I.6  
I.6.1  
I.6.2

30 3000K R RECESSED  
40 4000K S SURFACE  
50 5000K  
57 5700K

1 ON-OFF  
2 Triac

