


QUADRANT BOLLARD

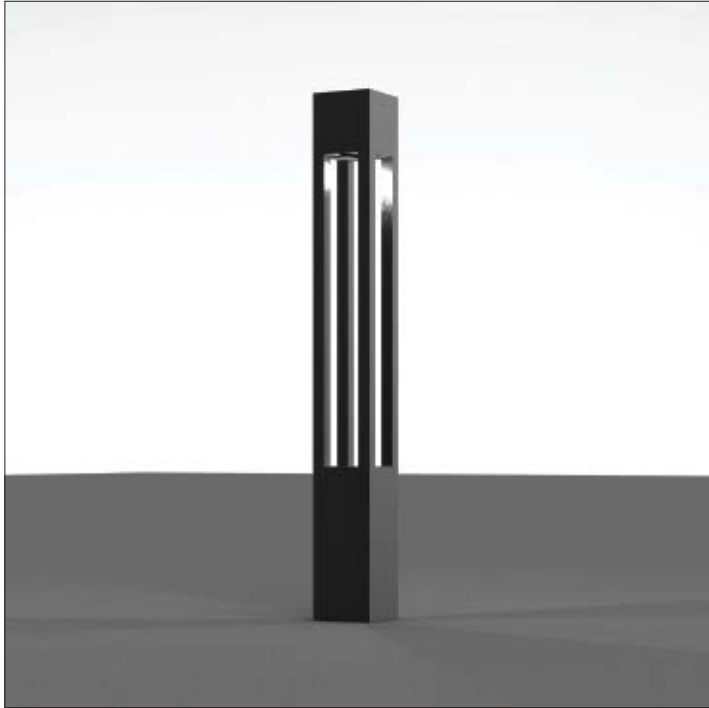

IP67	IK08	220-240V	5 YRS Warranty	10/20 WATTS
------	------	----------	-------------------	----------------

Upon request

1-10V	DALI
-------	------

PHYSICAL

Body	Aluminum Extruded Profile
Finish	Polyester Powder Coated
Dimensions	L120xW120xH1000mm L135xW135xH1000mm

OPTICAL


Diffuser	Opal Polycarbonate
Light Emission	Indirect Light Distribution

ELECTRICAL


Light source	LED
CRI	>80
CCT	3000K-4000K-5000K
Driver	Electronic included 50-60Hz 220-240VAC Non-Dimmable Driver 1-10V dimming or DALI on request
Operating Temperature	-40°C - +50°C
Humidity	10% - 90%RH

Range	Power(W)	Lumen (lm)
QUADRANT 1	10W	1200lm
QUADRANT 2	20W	2400lm

Quadrant 1



Quadrant 2



QUADRANT BOLLARD series stands out as a dependable option for pathways, landscaped areas, and various public spaces, featuring a square frame, complementary column choices, and a four-way light distribution.

-Glare is effectively minimized through a concealed light source.

-The 4 way light distribution not only efficiently illuminates pathways and areas but also introduces a distinctive visual effect.

-Various height options and a coordinating column make it suitable for high-end architectural projects.

-Its minimalistic design ensures seamless integration with diverse architectural styles.

-The bollard is characterized by easy installation and maintenance.

ORDERING CODE

SERIES NAME - PRODUCT RANGE - DIMENSIONS - CCT - CONTROL

QUADRANT BOLLARD	I 2	I TYPE I II TYPE II	30 3000K 40 4000K 50 5000K	1 ON-OFF 2 1-10V 3 DALI
------------------	--------	------------------------	----------------------------------	-------------------------------