

# OPIUM SERIES



# OPIUM SERIES



IP20	220-240V	5 YRS Warranty	7-50 WATTS
Upon request			
1-10V	DALI	+/- 25°	355°

## PHYSICAL

Body	Die cast Aluminum
Finish	Polyester Powder Coated

## OPTICAL

Diffuser	Polycarbonate
Aiming	355° Rotatable horizontally 325° Adjustable vertically

## ELECTRICAL

Light source	LED CREE
CRI	>80 (>90 available on request)
CCT	3000K-4000K-6000K
Driver	Electronic included   50-60Hz 220-240VAC Non-Dimmable Driver 1-10V dimming or DALI on request
Ambient Temp.	-20°C - 40°C

**OPIUM SERIES** is a recess-mounted LED that offers outstanding lumen packages for spaces that require a large amount of light.







This luminaire is indicated for lighting from high ceilings and for retail stores due to its adjustable factor.

OPIUM MONO

OPIUM MONO TRIMLESS

OPIUM DUAL

OPIUM DUAL TRIMLESS

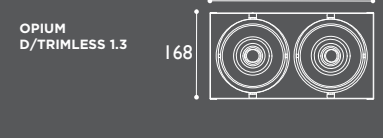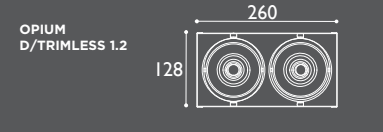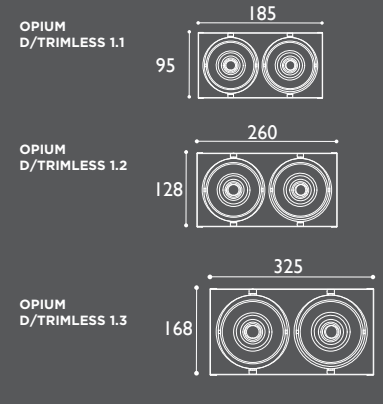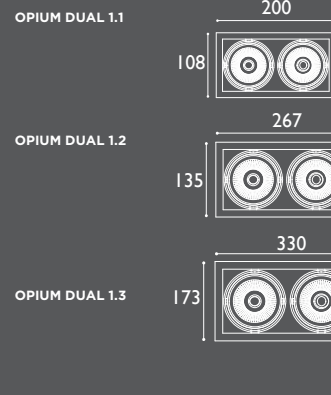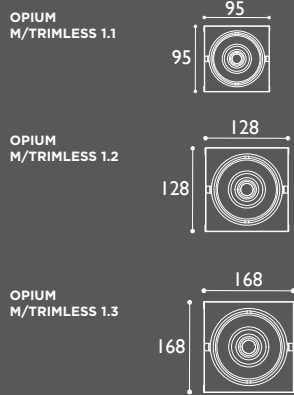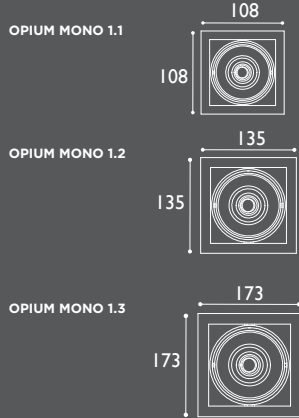

## PRODUCT RANGE

	Rated Power(W)	Lumen(lm)	Dimensions(mm)
OPIUM MONO 1.1	7W	560lm	L108xW108xH87.5
OPIUM MONO 1.2	15W	1200lm	L135xW135xH110
OPIUM MONO 1.3	25W	2000lm	L173xW173xH135
OPIUM M/TRIMLESS 1.1	7W	560lm	L95xW95xH85
OPIUM M/TRIMLESS 1.2	15W	1200lm	L128xW128xH110
OPIUM M/TRIMLESS 1.3	25W	2000lm	L168xW168xH135
OPIUM DUAL 1.1	2x7W	2x560lm	L200xW108xH85
OPIUM DUAL 1.2	2x15W	2x1200lm	L267xW135xH110
OPIUM DUAL 1.3	2x25W	2x2000lm	L330xW173xH135
OPIUM D/TRIMLESS 1.1	2x7W	2x560lm	L185xW95xH85
OPIUM D/TRIMLESS 1.2	2x15W	2x1200lm	L260xW128xH110
OPIUM D/TRIMLESS 1.3	2x25W	2x2000lm	L325xW168xH135

## ORDERING CODE

SERIES NAME	PRODUCT RANGE	FRAME TYPE	BODY FINISH	CCT	OPTICS	CONTROL
OPIUM	MONO 1.1	T TRIM	W WHITE	30 3000K 15 15°	1	ON-OFF
	MONO 1.2	TL TRIMLESS	B BLACK	40 4000K 24 24°	2	I-10V
	MONO 1.3			60 6000K 36 36°	3	DALI
	DUAL 1.1					
	DUAL 1.2					
	DUAL 1.3					