



SIDRA TILTABLE SERIES



PHYSICAL

| | |
|----------------|----------------------------|
| Body | Anodized die-cast Aluminum |
| Frame | Stainless Steel 316L |
| Recessing tube | Aluminum Alloy |


OPTICAL

| | |
|----------------|---------------------|
| Diffuser | 19mm Tempered Glass |
| Light Emission | Symmetrical |
| Aiming | Fixed |
| CRI | >80 |


ELECTRICAL

| | |
|-------------------|--|
| Color Temperature | 3000K - 4000K - 5000K |
| Gear | Integrated LED driver 220-240V 50/60Hz |
| Ambient Temp. | -25°C ~ 50°C |
| Ambient Humidity | 10% ~ 90% |


SIDRA TILTABLE series is specially designed to deliver low-glare lighting, thanks to the round meshed grill, to façades, columns, monuments and trees with minimal installation depth. The fixture is made of a combination of 316L stainless steel and die-cast Aluminum. It has an optical PMMA secondary light distribution technology, viewing angle, light-gathering effects that can be adjusted by various lens according to demands and could be supplied with an optional honeycomb louvre and/or anti-slip glass.

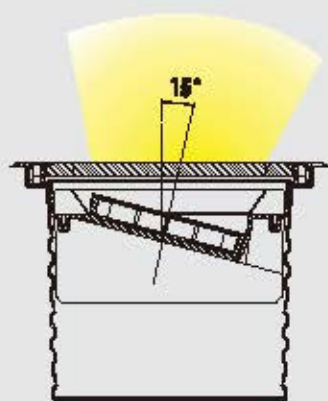


SIDRA TILTABLE 1



SIDRA TILTABLE 2.1-2.2



SIDRA TILTABLE 3.1-3.2



SIDRA TILTABLE SERIES

| | Rated Power(W) | Lumen(lm) at 20° | Dimensions (mm) | LED Quantity | Beam angle |
|---------------------------|----------------|------------------|-----------------|--------------|--|
| SIDRA TILTABLE 1 | 16W | 1040lm | ∅210xH164 | 6 pcs | 8°,12.5°,20°,30°,45°,60°,15x30°,10x60° |
| SIDRA TILTABLE 2.1 | 14W | 910lm | ∅260xH196 | 12 pcs | 8°,12.5°,20°,30°,45°,60°,15x30°,10x60° |
| SIDRA TILTABLE 2.2 | 32W | 2080lm | ∅260xH196 | 12 pcs | 8°,12.5°,20°,30°,45°,60°,15x30°,10x60° |
| SIDRA TILTABLE 3.1 | 42W | 3570lm | ∅330xH265 | 12 pcs | 6°,8°,12°,20°,30°,60°,10x70° |
| SIDRA TILTABLE 3.2 | 60W | 6600lm | ∅330xH265 | 12 pcs | 6°,8°,12°,20°,30°,60°,10x70° |

ORDERING CODE

SERIES NAME - PRODUCT RANGE - CCT - OPTICS - CONTROL

| | | | | |
|----------------|-----|----------|-------------------------|----------|
| SIDRA TILTABLE | 1 | 30 3000K | Refer to above table | 1 ON-OFF |
| | 2.1 | 40 4000K | | 2 1-10V |
| | 2.2 | 50 5000K | | 3 DALI |
| | 3.1 | | | |
| | 3.2 | | | |


ACCESSORIES



Honeycomb Grill



Anti-Slip Glass



Round-Meshed Grill