

DAISY SERIES



IP44	220-240V	5 YRS Warranty	7-20 WATTS
Upon request			
1-10V	DALI	DMX	LOW GLARE
			UGR <19

PHYSICAL

Body	Die cast Aluminum
Finish	Polyester Powder Coated

OPTICAL



Diffuser	Polycarbonate
Beam Angle	15°,24°,36°,60°,75°

ELECTRICAL

Light source	LED CREE
Efficacy	80lm/W, 100lm/W
CRI	>80 (>90 available on request)
CCT	3000K-4000K-6000K
Driver	Electronic included 50-60Hz 220-240VAC Non-Dimmable Driver 1-10V dimming or DALI on request
Ambient Temp.	-20°C - 45°C
Light source Life	60,000h

DAISY SERIES is an anti-glare downlight with honeycomb grill. It adopts high lumen light source, deep reflector and low glare UGR<19, which provides a comfortable visual experience. The aluminum profile provides excellent thermal dissipation and ensures a long lifespan. DALI, 10-1V driver are available to provide excellent dimming effect.

It is designed for general lighting applications in offices, schools, hotels etc. It is also widely used for public areas, such as stairway, lobby, reception, corridors etc.

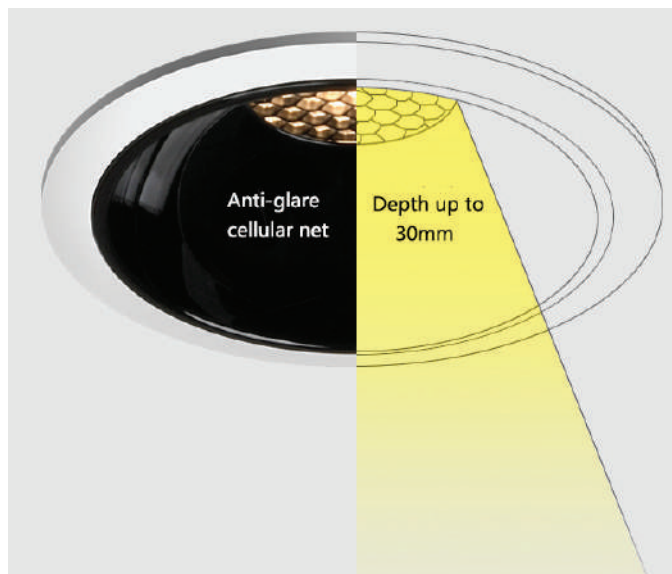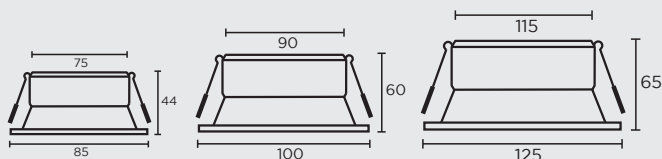

DAISY LE HC | 80lm/W

	Rated Power(W)	Lumen (lm)	LED	Dimensions (mm)	Cut-out Dimensions (mm)
DAISY 1.1 LE HC	7W	560 lm	CREE	Ø85xH50mm	Ø75mm
DAISY 1.2 LE HC	10W	800 lm	CREE	Ø100xH60mm	Ø90mm
DAISY 1.3 LE HC	12W	960 lm	CREE	Ø100xH60mm	Ø90mm
DAISY 1.4 LE HC	20W	1600 lm	CREE	Ø125H65mm	Ø115mm

DAISY LE | 90lm/W

	Rated Power(W)	Lumen (lm)	LED	Dimensions (mm)	Dimensions (mm)
DAISY 1.1 LE	7W	630 lm	CREE	Ø85xH50mm	Ø75mm
DAISY 1.2 LE	10W	900 lm	CREE	Ø100xH60mm	Ø90mm
DAISY 1.3 LE	12W	1080 lm	CREE	Ø100xH60mm	Ø90mm
DAISY 1.4 LE	20W	1800 lm	CREE	Ø125H65mm	Ø115mm

DAISY HE HC | 100lm/W

	Rated Power(W)	Lumen (lm)	LED	Dimensions (mm)	Dimensions (mm)
DAISY 1.1 HE HC	7W	700 lm	BRIDGELUX	Ø85xH50mm	Ø75mm
DAISY 1.2 HE HC	10W	1000 lm	BRIDGELUX	Ø100xH60mm	Ø90mm
DAISY 1.3 HE HC	12W	1200 lm	BRIDGELUX	Ø100xH60mm	Ø90mm
DAISY 1.4 HE HC	20W	2000 lm	BRIDGELUX	Ø125H65mm	Ø115mm

DAISY HE | 120lm/W

	Rated Power(W)	Lumen (lm)	LED	Dimensions (mm)	Dimensions (mm)
DAISY 1.1 HE	7W	840 lm	BRIDGELUX	Ø85xH50mm	Ø75mm
DAISY 1.2 HE	10W	1200 lm	BRIDGELUX	Ø100xH60mm	Ø90mm
DAISY 1.3 HE	12W	1440 lm	BRIDGELUX	Ø100xH60mm	Ø90mm
DAISY 1.4 HE	20W	2400 lm	BRIDGELUX	Ø125H65mm	Ø115mm

ORDERING CODE

SERIES NAME - PRODUCT RANGE - BODY FINISH - REFLECTOR COLOR - CCT - OPTICS - CONTROL

DAISY	I.1 LE HC	W WHITE	W WHITE	30 3000K	15 15°	1 ON-OFF
	I.2 LE HC	B BLACK	B BLACK	40 4000K	24 24°	2 I-10V
	I.3 LE HC			60 6000K	36 36°	3 DALI
	I.4 LE HC				60 60°	
	I.1 LE				75 75°	
	I.2 LE					
	I.3 LE					
	I.4 LE					
	I.1 HE HC					
	I.2 HE HC					
	I.3 HE HC					
	I.4 HE HC					
	I.1 HE					
	I.2 HE					
	I.3 HE					
	I.4 HE					